PassTest Bessere Qualität , bessere Dienstleistungen!



Q&A

http://www.passtest.de Einjährige kostenlose Aktualisierung Exam : 350-601

Title : Implementing Cisco Data

Center Core Technologies

(350-601 DCCOR)

Version: DEMO

1.Host 1 is in VLAN 100 located is Data Center 1 and Host2 is in VLAN200 located in DataCenter2. Which OTV VLAN mapping configuration allows Layer 2 connectivity between these two hosts?

A)

DC1:

interface Overlay1 otv extend-vlan 100 otv vlan mapping 100 to 200

DC2:

interface Overlay1 otv extend-vlan 100 otv vlan mapping 100 to 200

B)

DC1:

interface Overlay1 otv extend-vlan 100 otv vlan mapping 100 to 200

DC2:

interface Overlay1 otv extend-vlan 200

C)

DC1:

interface Overlay1 otv extend-vlan 100

DC2:

interface Overlay2 otv extend-vlan 200

DC1:

interface Overlay1 otv extend-vlan 100

DC2:

interface Overlay1 otv extend-vlan 200

A. Option A

- B. Option B
- C. Option C
- D. Option D

Answer: B

Explanation:

https://www.cisco.com/c/en/us/support/docs/switches/nexus-7000-series-switches/200998-Nexus-7000-OTV-VLAN-Mapping-on-Overlay.html?dtid=osscdc000283

https://www.cisco.com/c/en/us/support/docs/switches/nexus-7000-series-switches/200998-Nexus-7000-OTV-VLAN-Mapping-on-Overlay.html

2.APIC EPG Resolution Immediacy is set to "Immediate".

Which statement is true about the Deployment Immediacy for VMM domains associated to EPGs?

A. The "Immediate" and "On demand" options require a port group to be created on the VDS.

- B. If "On demand" is selected, the policy is programmed in the hardware only when the APIC detects a VM created in the EPG.
- C. If "On demand" is selected the policy is programmed in the hardware only when the first packet is received through the data path.
- D. If "immediate" is selected the policy is programmed in the hardware as soon as the leaf is booted.

Answer: C Explanation:

"Deployment Immediacy On demand — Specifies that the policy is programmed in the hardware policy CAM only when the first packet is received through the data path."

https://www.cisco.com/c/en/us/td/docs/switches/datacenter/aci/apic/sw/1-x/aci-fundamentals/b_ACI-Fundamentals/b_ACI-Fundamentals_chapter_01011.html#concept_7A9DDA71E41543258E5B49B58BC5AE 4F

3. Which MAC address is an HSRP version 2?

A. 0100.5E7F.FFFF

B. 3799.9943 3000

C. 0000.0C9F.F0C8

D. 0000.OC07.AC1H

Answer: C
Explanation:
Reference:

https://www.cisco.com/c/en/us/td/docs/ios-xml/ios/ipapp_fhrp/configuration/xe-3s/fhp-xe-3s-book/fhp-hsr p-v2.html

4.An engineer needs to create a new user in the local user database on Cisco UCS Fabric Interconnect. The user needs permissions to change the following configuration inside UCS Manager version 3.1:

- vNIC and vHBA profiles
- Fan speed and power redundancy profile of UCS Manager

Which two roles must be assigned to a user to achieve this goal? (Choose two.)

A. server-compute

B. facility-manager

C. operations


D. server-equipment

E. server-profile

Answer: A,D **Explanation:** Reference:

https://www.cisco.com/c/en/us/td/docs/unified_computing/ucs/ucs-manager/GUI-User-Guides/Admin-Management/3-1/b_Cisco_UCS_Admin_Mgmt_Guide_3_1/b_UCSM_Admin_Mgmt_Guide_chapter_01.html

5.Refer to the exhibit.

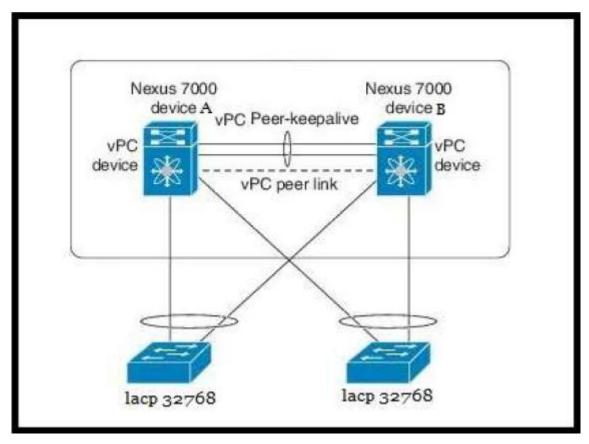

Which configuration ensure that the cisco Nexus 7000 series switches are the primary devices for LACP?

A. N7K A(config-vpc-domain)# role priority 1

N7K_B(config-vpc-domain)# role priority 2

B. N7K_A(config-vpc-domain)# system-priority 32768

N7K B(config-vpc-domain)# system-priority 32768

C. N7K A(config-vpc-domain)# system-priority 100

N7K_B(config-vpc-domain)# system-priority 200

D. N7K_A(config-vpc-domain)# system-priority 4000

N7K_B(config-vpc-domain)# system-priority 4000

Answer: D